

Monochrome VGA 1/2" Type CCD Camera with  
Double-Speed Scan for Faster Data Processing



# CS8570D

## Key Features

**DOUBLE-SPEED IMAGE PROCESSING:** The CS8670D has twice the driving frequency of conventional cameras for faster data processing in high-speed machine vision applications

**ALL-PIXEL READOUT** mode permits all pixel signals in the effective area to be output for greater accuracy, plus in partial scan (1/4 or 1/2 screen) image readout is even faster

**SQUARE GRID PIXEL ARRAY** facilitates computation for faster image processing without blurring

**HIGH VERTICAL RESOLUTION** even under RTS mode (in 1/60 sec), images experience no deterioration in vertical resolution

**ULTRA-COMPACT & LIGHTWEIGHT** camera design solves space restriction problems, plus has excellent shock/vibration resistance

**RESTART/RESET** function, when set on, enables the camera to capture images at an arbitrary timing cued by external VD signal

## SPECIFICATIONS


Image sensor	All Pixel's Data Read-out Interline CCD
Total pixels	692(H) x 504(V)
Active pixel	659(H) x 494(V)
Video output pixels	648(H) x 494(V) (Under non-interlace)
Scanning area	6.4(H) x 4.8(V) mm (Equivalent to 1/2 type CCD size)
Unit cell size	9.9(H) x 9.9(V) micro m (Square-grid array)
TV system	Special format (Non-conforming to EIA)
Scanning lines	525 lines
Interlace	1/60s Non-interlace mode 1/120s 2:1 Interlace mode Switching via rear-panel DIP SW
Sync system	Internal/External automatic switch-over
Aspect ratio	4:3
Video output	VS 1.0V(p-p) / 75, DC coupled, 1 line (AC as [Option])
Resolution	485 TV lines(H) 485 lines (350 TV lines)(V)
S/N	Standard: 52dB(p-p)/rms (Initial factory setting)
Illumination	Standard 400 lx (F5.6) Minimum 4 lx (F1.4) (GAIN MAX, Approx. 50% video output)
Gain	FIX (Fixed) gain: Factory-shipped preset level MANU (Manual) gain: Setting through GAIN VR FIX / MANU switching via rear-panel DIP SW
Gamma correction	Gamma = 1 (Fixed)
White-clip level	Approx. 840mV(p-p) (Excluding SYNC)
Power source	DC12V $\pm$ 10% Ripple voltage: 50mV(p-p) or less
Power consumption	Approx. 1.5W
Internal sync	
Base clock frequency	24.545MHz (1CLK) $\pm$ 200ppm
H sync frequency	31.468kHz (1H = 780CLK)
V sync frequency	59.94Hz (Under non-interlace) 119.88Hz (Under 2:1 interlace)
External sync	
Ext. sync input signal	HD/VD
Input level	From 2 through 5V (p-p) under high impedance From 2 through 4V (p-p) under 75-ohm input
Input impedance	75-ohm / High impedance 10k-ohm (switching via rear-panel SW)
Interlace	1/60s non-interlace or 1/120s 2:1 interlace
Polarity	Negative
Pulse width	HD: 3.2 +/- 1 micro s (LOW) VD: From 125 through 400 micro s (LOW)
Repeating frequency	fH = 31.468kHz +/- 1% fV = fH/262.5 or fH/525
Phase difference	HD/VD: 0 +/- 5.0 micro s, 1/fH/2 +/- 5.0 micro s
Electronic shutter	8 steps (OFF, 1/200s, 1/500s, 1/1000s, 1/2000s, 1/4000s, 1/8000s, 1/20000s)
External dimension	29 x 29 x 39.5(D) mm
Weight	Approximately 42g
Lens mount	C mount
Operating Condition	0 through 40 degrees C, 10 to 90% Humidity

## Typical Applications

Video image capture applications for the CS8570D include extremely high-speed machine vision, factory automation, inspection, quality control, positioning and many others.

## Typical Spectral Response


(lens characteristics and light source is not reflected in table)

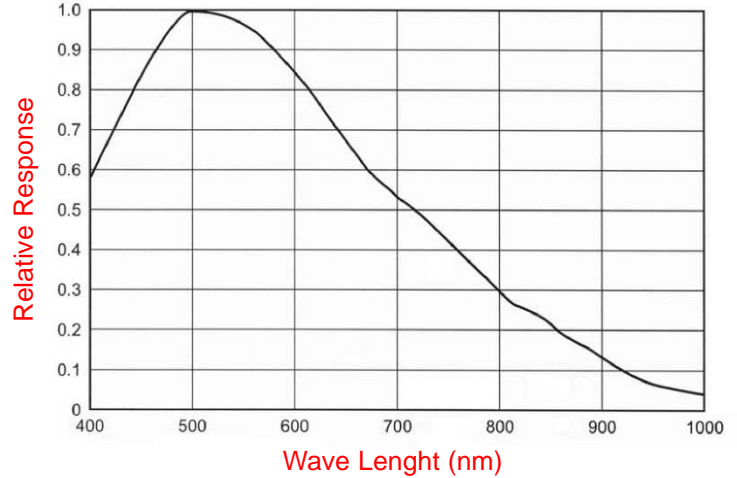

## DC IN/SYNC CONNECTOR ASSIGNMENT

Camera Connector: HR10A-10P-12S (Hirose Elec.)

PIN	SIGNAL		
	(STANDARD)	(OPTION)	
1	DC12V GND		
2	DC12V		
3	VIDEO GND		
4	VIDEO OUT		
5	HD GND		
6	HD IN		
7	VD IN		
8	TRIG GND	NC	
9	NC	TRIG IN	
10	WEN OUT	GND	
11	TRIG IN	DC12V	NC
12	VD GND	PARTIAL	

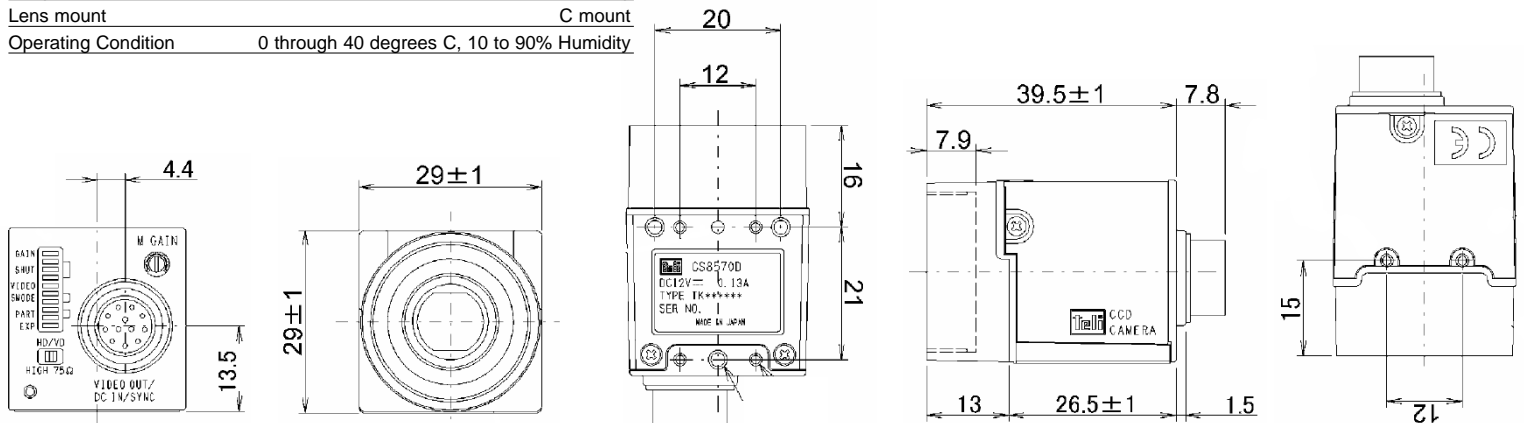

### TOSHIBA TELI CORPORATION

7-1, 4-chome Asahigaoka  
Hino-shi, Toyko 191-0065 Japan  
TEL: +81-042-589-8771  
FAX: +81-042-589-8774  
www.toshiba-teli.co.jp

### TOSHIBA TELI AMERICA, INC.

33 Hammond, Suite 211  
Irvine, California 92618 USA  
TEL: +1-949-770-TELI(8354)  
FAX: +1-949-206-0210  
www.toshiba-teli.com

